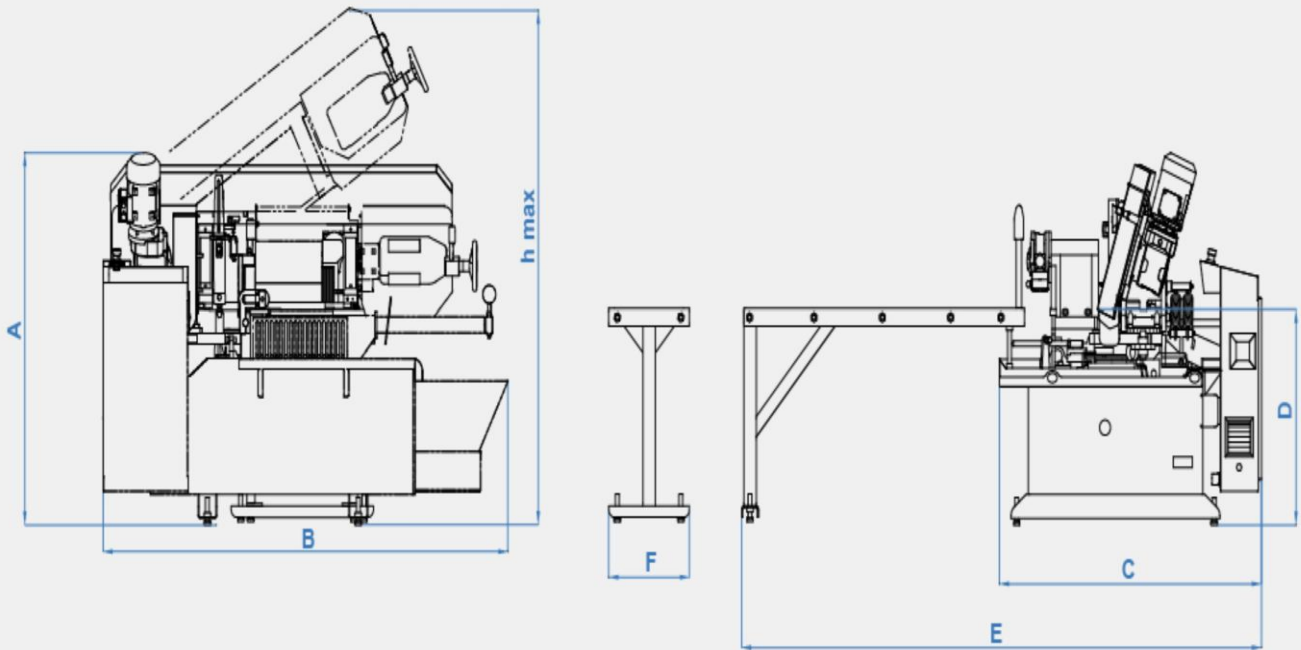


PAR 300 M








Yarı Otomatik Testere Tezgahı



TEKNİK ÖZELLİKLER



A	1392 mm 54.80 inch	B	2120 mm 83.46 inch	C	1415 mm 55.71 inch	D	810 mm 31.89 inch	E	2740 mm 107.87 inch	F	425 mm 16.73 inch	h max	2010 mm 79.13 inch
---	-----------------------	---	-----------------------	---	-----------------------	---	----------------------	---	------------------------	---	----------------------	-------	-----------------------

 Otomatik Automatic	 Şerit Ölçüsü Blade Dimension 27 x 0.9 x 3970 mm 1 x 0.035 x 156.3 inch	 Şerit Motoru Blade Motor 1.5 kW - 1500 d/d 2 hp - 1500 rpm	 Sürücü Motor Feeding Motor 0.25 kW - 1500 d/d 0.33 hp - 1500 rpm
 Hidrolik Motor Hydraulic Pump Motor 0.75 kW - 1400 d/dk 1 hp - 1400 rpm	 Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm	 Voltaj Voltage 400 V 400 V	 Maksimum Güç Maximum Power 2.62 kW 3.51 hp
 Kesme Hızı Cutting Speed 15 m/dk - 100 m/dk 49 m/dk - 462 ft/min	 Ağırlık Weight 1000 kg 2204 lbs	 Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	 Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

		90°		mm inch								
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity				170 mm 6.69 inch	270 mm 10.62 inch	300 mm 11.81 inch	300 mm 11.81 inch				
300 mm 11.81 inch	340 mm 13.39 inch				160 mm 6.29 inch	220 mm 8.66 inch	220 mm 8.66 inch	220 mm 8.66 inch				
					110 x 170 mm 4.33 x 6.69 inch	170 x 270 mm 6.69 x 10.62 inch	220 x 300 mm 8.66 x 11.81 inch	220 x 340 mm 8.66 x 13.38 inch				